

DHI-ARD1233-W2(868)

Wireless PIR detector



- · Pet immunity function.
- · Auto temperature compensation.
- · 3-level sensitivity adjustment.
- · Signal strength detection.
- · Low battery alarm.

Encryption Mode

- Temperature monitoring.
- Frequency hopping function and two-way communication technology ensure communication stability.

AES128

• Cloud update and automatic recovery from update failure.

System Overview

Wireless PIR detector is a wireless motion detector that can detect if there is a human moving around the detector. It can detect human or large animals invading the armed area, and provides timely notifications of alarm events, acting as a monitoring mechanism.

Scene

Mainly applied for villas, shops, apartments, etc.

Technical Specification

rechnical Specification		
Port		
Indicator Light	1 × green alarm indicator	
Button	1 × power button	
Function		
Tamper Alarm	Yes	
Remote Upgrade	Cloud update	
Search	Signal strength detection	
Test Mode	Yes	
Low Battery Alarm	Yes	
Wireless		
Carrier Frequency	868.0 MHz-868.6 MHz	
Transmitter Power(EIRP)	Limit 25mW	
Communication Distance	Up to 1,600 m (5,249.34 ft) in an open space	
Communication Mechanism	Two-way	

Frequency Hopping	Yes	
General		
Power Supply	CR123A battery	
Power Consumption	Max. 120 mW	
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F) (indoor)	
Operating Humidity	10%-90% (RH).	
Dimensions	104.0 mm \times 60.0 mm \times 50.0 mm (4.09" \times 2.36" \times 1.97") (L \times W \times H)	
Package Dimensions	135.0 mm \times 98.5 mm \times 56.8 mm (5.31" \times 3.88" \times 2.24") (L \times W \times H)	
Installation Mode	Wall mount	
Net Weight	100 g (0.22 lb)	
Gross Weight	170 g (0.37 lb)	
Certifications	CE EN 50131-1:2006+A1:2009+A2:2017+A3:2020 EN 50131-2-2:2017 EN 50131-6:2017 EN 50131-5-3:2017 Security Grade 2 Environmental Class II	
Battery Life	4 years	
Casing	PC + ABS	
Temperature		
Measuring Range	-15 °C to +65 °C (+18.8 °F to +149 °F) (indoor)	

± 1 °C (± 33.8 °F)


Measuring Precision

ARD1 | DHI-ARD1233-W2(868)


Resolution	1 °C (33.8 °F)
	1 6 (55.6 1)
Specification	
Detection Mode	PIR
Sensor	Dual-element low-noise PIR sensor
Detection Range	12 m (39.37 ft) (90°) with installation height of 2.2 m (7.21 ft)
Detection Speed	0.3 m/s-3 m/s (0.98 ft/s-9.84 ft/s)
Pet Immunity Level	≤ 18 kg (39.68 lb)
White Light Resistance Level	2000 lx
Two-way Digital Temperature Compensation	Yes, no attenuation of detection distance in high temperature
Sensitivity	3 levels adjustable

Ordering Information				
Туре	Part Number	Description		
Wireless PIR detector	DHI- ARD1233-W2(868)	Wireless PIR detector		

Installation

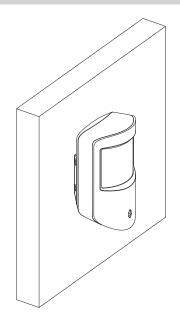

Dimensions (mm[inch])

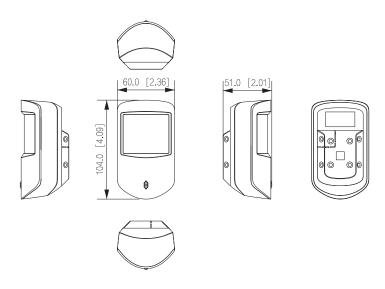

Application

